






Surface Testing Suite: **Bubble Tube with Thermocouple Wellhead Logger**

Features

-  Welded Sensor – No O-Rings
-  Extreme Service Reliability
-  1 Million Sample Capacity
-  Explosion Proof Enclosure

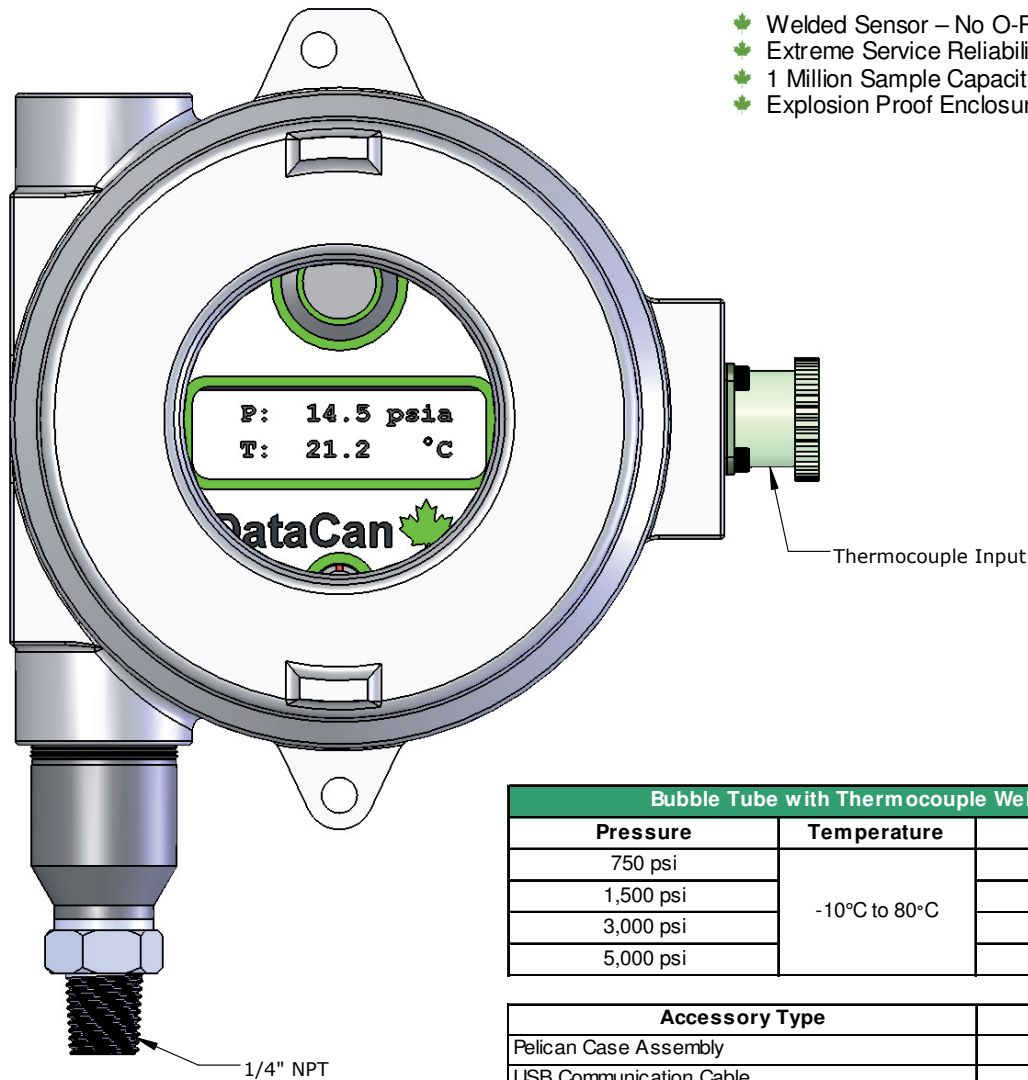

Bubble Tube with Thermocouple Wellhead Logger		
Pressure	Temperature	Part No.
750 psi	-10°C to 80°C	107440
1,500 psi		107441
3,000 psi		107442
5,000 psi		107443

Accessory Type	Part No.
Pelican Case Assembly	100853
USB Communication Cable	100682
Adaptor 1/2" NPT	102855

Specifications		
	Pressure	Temperature
Accuracy Up To	0.022% F.S.	0.25°C
Resolution	0.0003% F.S.	0.005°C
Drift	< 3 psi / year	< 0.1°C / year
Capacity	1 Million Samples	
Communication Method	USB	