


Quick Shut-In Tool: 3.5" Production Valve

Features

- ✱ Instant Close Time
- ✱ Multiple Cycle Capability
- ✱ Metal to Metal Seals
- ✱ Eliminates Wellbore Storage Effect
- ✱ Modular Design

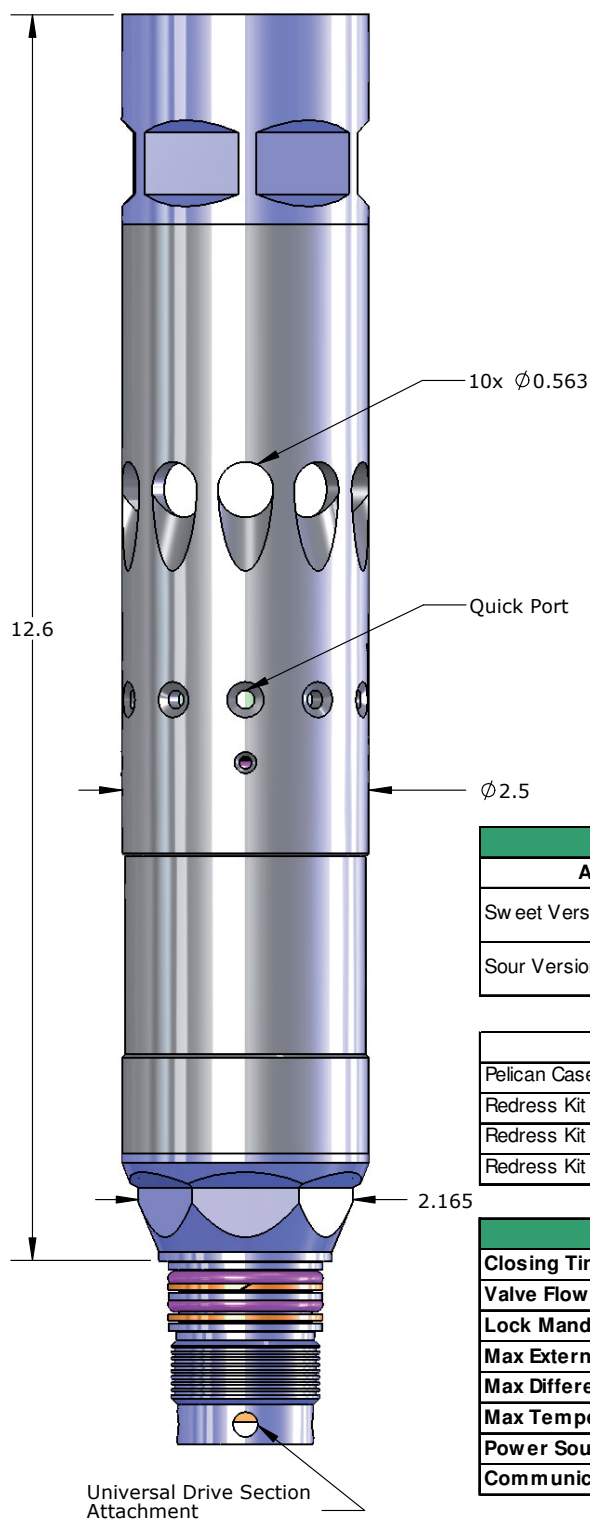

2.5" OD Quick Shut In Tool Production Valve		
Assembly Type	Material	Part No.
Sweet Version	SS17-4 Toughmet Piston	100205
Sour Version	Inconel 718 Toughmet Piston	100219

Accessory Type	Part No.
Pelican Case Assembly	100193
Redress Kit Viton 90	100223
Redress Kit Aflas 7182B	100224
Redress Kit Chemraz 510	100225

Specifications	
Closing Time	Instantaneous
Valve Flow Area	2.50 in ² (16.1 cm ²)
Lock Mandrel Flow Area	2.40 in ² (15.5 cm ²)
Max External Pressure	16,000 psi (1,100 bar)
Max Differential Pressure	10,000 psi (700 bar)
Max Temperature	350 °F (177 °C)
Power Source	3 "D" Cell Battery Pack (11.0 Volts, 10.0Ahr)
Communication Method	USB