



Surface Testing Suite: Quartz Wellhead Logger

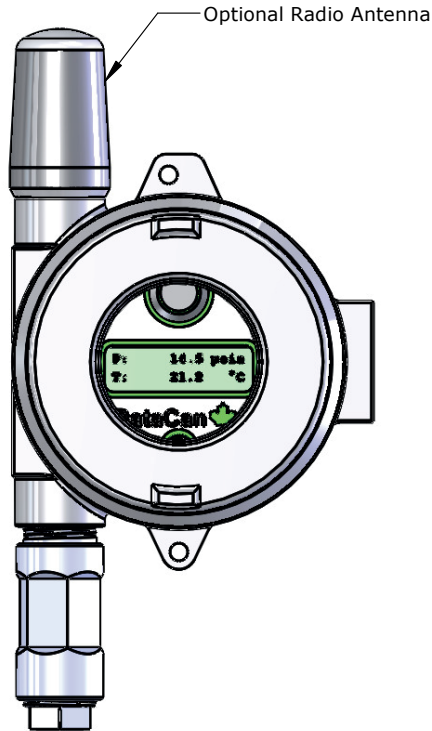

Features

- ✦ Extreme Service Reliability
- ✦ High Resolution Measurements
- ✦ 1 Million Sample Capacity
- ✦ Explosion Proof Enclosure
- ✦ 1/4" High Pressure Connection
- ✦ Programmable with DataCan Software
- ✦ Optional External Download and External Start/Stop

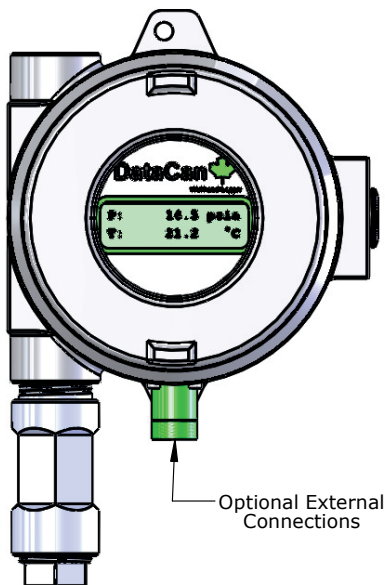

Wellhead Logger			
Pressure	Temperature	Communication	Part No.
5,000 psi	-40°C to 85°C	USB Only	104401
10,000 psi			104402
20,000 psi			104403
30,000 psi			104404
5,000 psi		USB & Radio	104405
10,000 psi			104406
20,000 psi			104407
30,000 psi			104408

Wellhead Logger - External Connect			
Pressure	Temperature	Communication	Part No.
10,000 psi	-40°C to 85°C	USB Only	105282
20,000 psi			105283
30,000 psi			105284

Accessory Type	Part No.
Pelican Case Assembly	100853
USB Communication Cable	100682
Radio 100m	102044
USB Radio Receiver	101790
Adapter 1/2" NPT	101438
Adapter 3/4" NPT	100849
Adapter Autoclave	100850

Specifications		
	Pressure	Temperature
Accuracy Up To	0.020% F.S.	1.0°C
Resolution (scales directly with gatetime)	<0.012 psi/sec	<0.005°C/sec
Drift	Negligible	Negligible
Capacity	1 Million Samples	